

MCS 401 – Computer Algorithms I
Fall 2022
Problem Set 3

Lev Reyzin

Due: 10/10/22 by the beginning of class

1. [10 pts] Suppose we are given an instance of the Minimum Spanning Tree (MST) problem on an undirected graph G . We assume that all edge costs are positive and distinct. Let T be the minimum-cost spanning tree for this instance. Now suppose we replace each edge cost c_e by its square, c_e^2 , thereby creating a new instance of the problem with the same graph but with different costs. Prove or disprove the following claim: T must be the minimum-cost spanning tree in this new instance.

2. [10 pts] Consider you get as input a very sparse undirected weighted graph $G = (V, E)$, in particular for which $|E| - |V| = 20$. Give an $O(|V|)$ time algorithm for finding a minimum spanning tree on G and prove your algorithm correct.

3. [10 pts] You are given a one dimensional array that may contain both positive and negative integers. Give an $O(n \log n)$ algorithm to find the sum of contiguous (ie. next to one another, in sequence) subarray of numbers which has the largest sum. For example, if the given array is

$$[-2, -5, \mathbf{6}, -2, -3, \mathbf{1}, \mathbf{5}, -6],$$

then the maximum subarray sum is 7 (the subarray is marked in boldface). Argue that your algorithm is correct.

4. [10 pts] You are given two arrays, A and B , each of which contains n integers. The elements in each array are guaranteed to already be in sorted order in the input, i.e.

$$A[0] \leq A[1] \leq \dots \leq A[n-1],$$

and also

$$B[0] \leq B[1] \leq \dots \leq B[n-1].$$

Give as fast an algorithm as you can for finding the *median* value of all the $2n$ numbers in both A and B . (We define the median of $2n$ numbers to be the average of the n th smallest and n th largest values.) Argue that your algorithm is correct and give its running time.

5. [10 pts] You are given an array X of n elements. A majority element of X is any element occurring in more than $n/2$ positions. The only access you have to the array is to compare any two of its elements for equality; hence you cannot sort the array, nor add up its values, etc. Design an $O(n \log n)$ divide-and-conquer algorithm to find a majority element in X (or determine that no majority element exists).

6. [10 pts] You are given a $2^k \times 2^k$ board with one missing cell. (See Figure 1 below.)

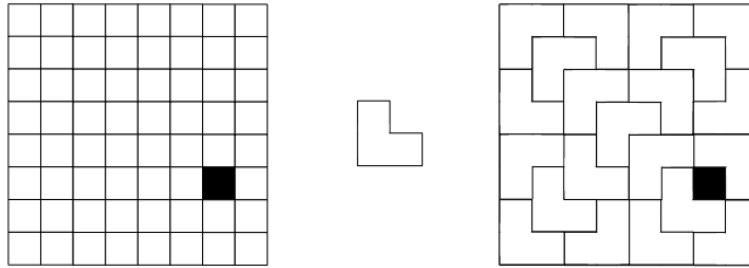


Figure 1: On the left is an example grid with a missing cell, with $k = 3$. In the middle is the “L-shaped” tile, to be used for tiling. On the right is an example solution.

Give an $O(2^{2k})$ -time algorithm for filling the board with “L-shaped” tiles.